



iPod 4th Generation or Photo Hard drive Replacement by a micro SD card

This tutorial will help you to replace a broken hard drive disk on an iPod 4th by a micro sd card with an higher capacity.

Written By: Marc_Alx



INTRODUCTION

As time goes by old iPod with hard drive may experience some common issues from dead battery to broken hard drive... In this tutorial we will replace the old hard drive of an iPod 4th gen with an micro sd card that may holds a much larger capacity. *(The screen illustrating this tutorial appears when iPod hard drive is broken)*



TOOLS:

- [iFixit Opening Tool](#) (1)



PARTS:

- [New Item](#) (1)
- [Micro SD card](#) (1)

As these iPod are old, it's hard to find the equivalent hard drive we will use an SD card in replacement. As for the size I recommend between 4gb and 128gb some user reports using up to 256gb. For this tutorial I use a 32gb one.

- [New Item](#) (1)
- [New Item](#) (1)

A Mac with Music installed is fine too.

- [USB Power Adapter for iPhone and iPod](#) (1)

Step 1 — Rear Panel



i Before opening your iPod, ensure that the hold switch is in the locked position. The orange bar should be visible, indicating hold is active.

Step 2




- Insert an opening pick as far as possible into the seam between the plastic front and the metal rear panel, on the right edge of the iPod.
 - ⓘ You may need to rock the pick back and forth to slide it in farther.
- Use the opening pick to pry up against the plastic front panel and release five retaining tabs (seen in the third photo).
- Slide the pick along the edge of the iPod and continue prying to release the rest of the retaining tabs.
- After all five tabs along the right side are free, the case should easily open.

Step 3



- **i** The iPod case is now open, but don't separate the two halves just yet. There is still an orange ribbon cable connecting the headphone jack to the logic board.
- Open the case like a book with the dock connector edge at the top, and lay the rear panel next to the front half of the iPod.

Step 4

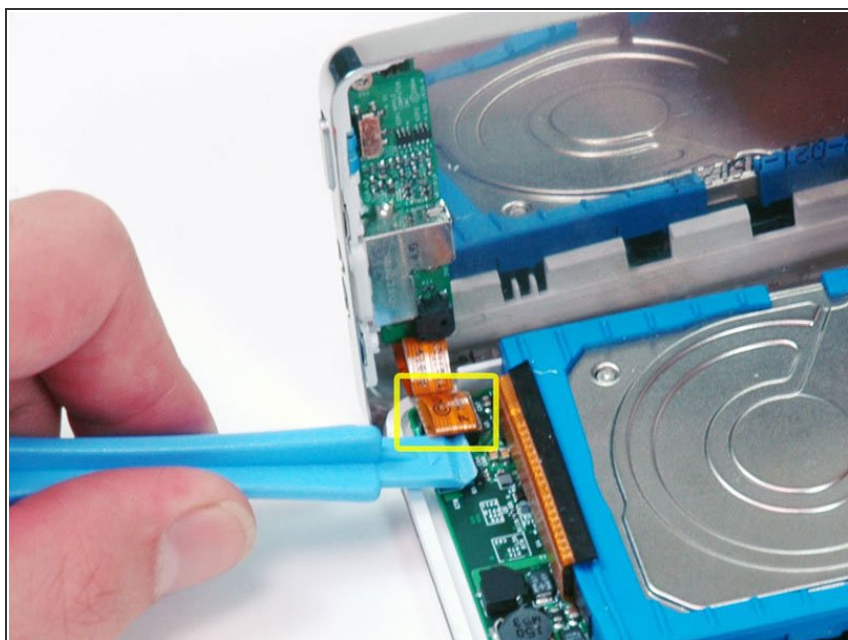


- Use a plastic tool or your fingernails to carefully disconnect the orange headphone jack cable. Be sure to

pull straight up on the connector, not the cable itself.

- i** This ribbon cable is very fragile. If you are replacing the battery, you can choose to skip this step and keep the headphone jack connected to the motherboard. Prop and tape the rear case against a box to keep it in place. Be very careful not to strain the fragile headphone jack cable as you work.

Step 5 — Removing the hard drive disk

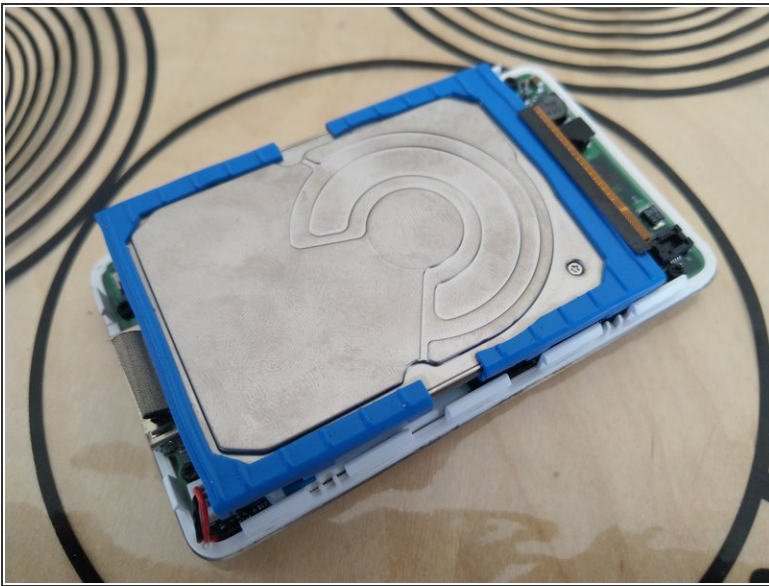


- Remove the hard drive with your hand, by holding both the iPod and hard drive connector (hold tight in order to not broke the connector).

Step 6 — Assemble the storage unit



- Put the micro sd card into the CF adapter.
- Then put the CF adapter into the CE to CF 1.8" adapter.


Step 7 — (optional) Remove the hard drive disk connector stopper

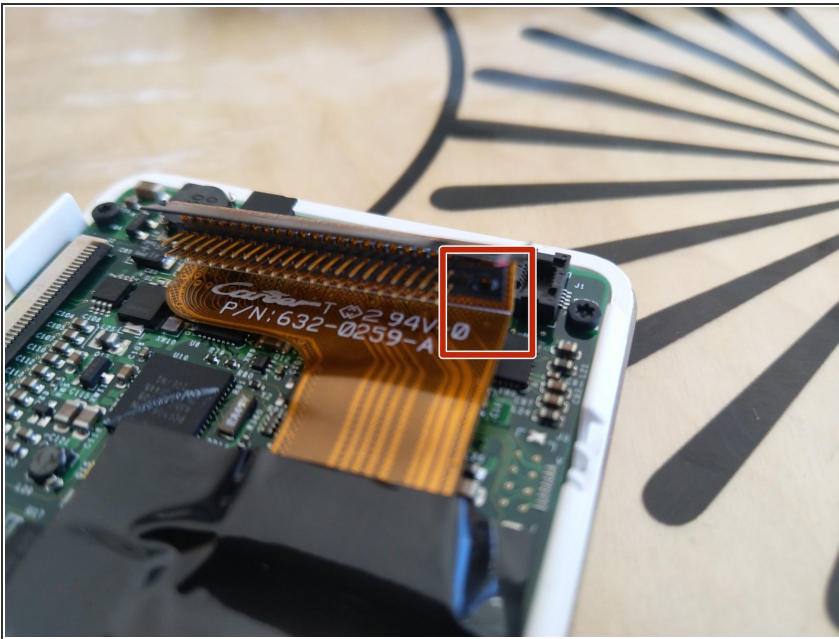

- Depending on the CE adapter you have, you may need to remove the stopper on the hard drive disk connector on the iPod. Use tweezers to do so.


⚠ If you notice that you can't fully plug your new memory unit without this step do this, else your memory unit may not be recognized.

Step 8 — Plug your storage unit

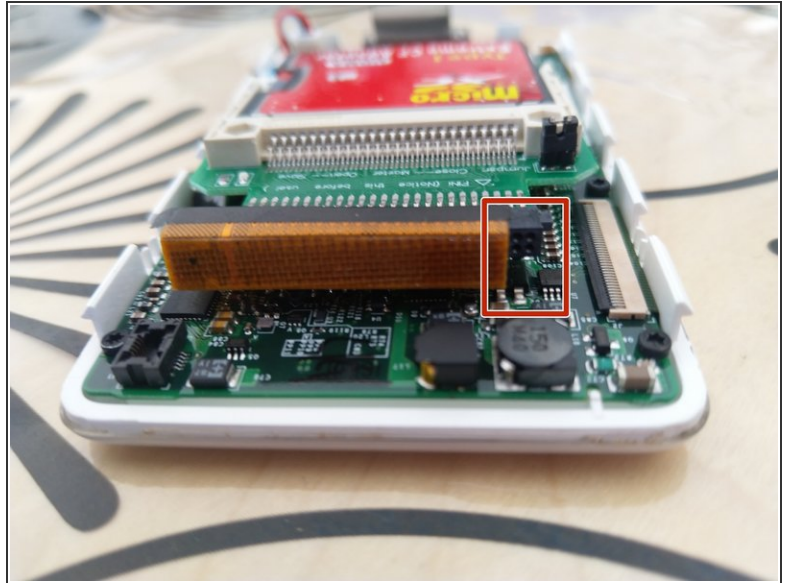

- Plug your memory unit in place of the old hard drive.
- It's normal that to have 4 free slots on the memory unit. Be sure to position the memory unit as on the photo.
- ⓘ It may be usefull to use double face tape on the battery to ensure the storage unit won't move.
- ⓘ Storage unit being thicker than an hard drive, adding a card board on it may help keeping everythin in place while reassembling.

Step 9 — Reconnect bottom case connector

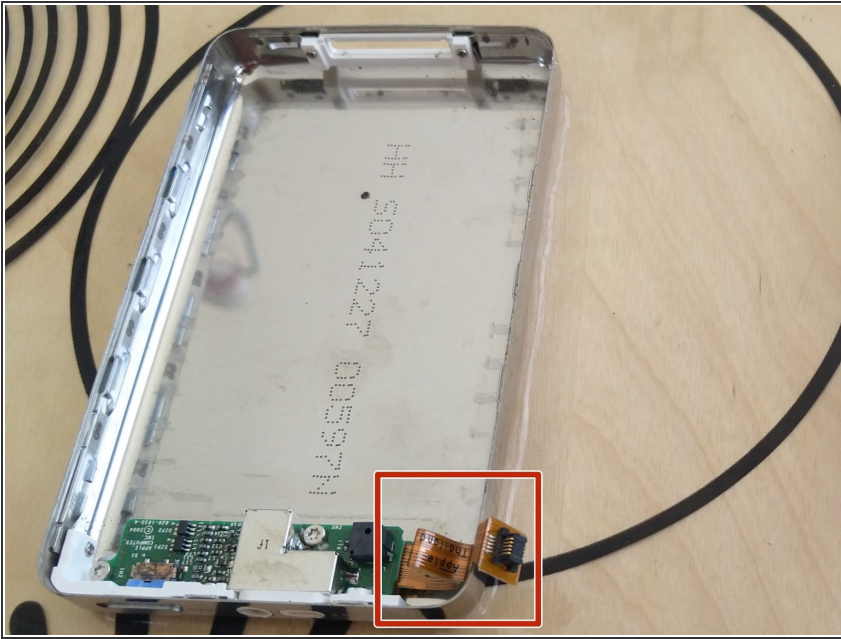

- Reconnect the bottom case connector. Before reassembling the iPod.


Step 10 — Connect your iPod to your PC



⚠ Don't reassemble your iPod before connecting it to your PC. The opening step is the hardest part, in case of mistake you won't have to reopen it.


- Just put the top case on the bottom one without pushing.

Step 11 — (optional) Install iPod support on your computer

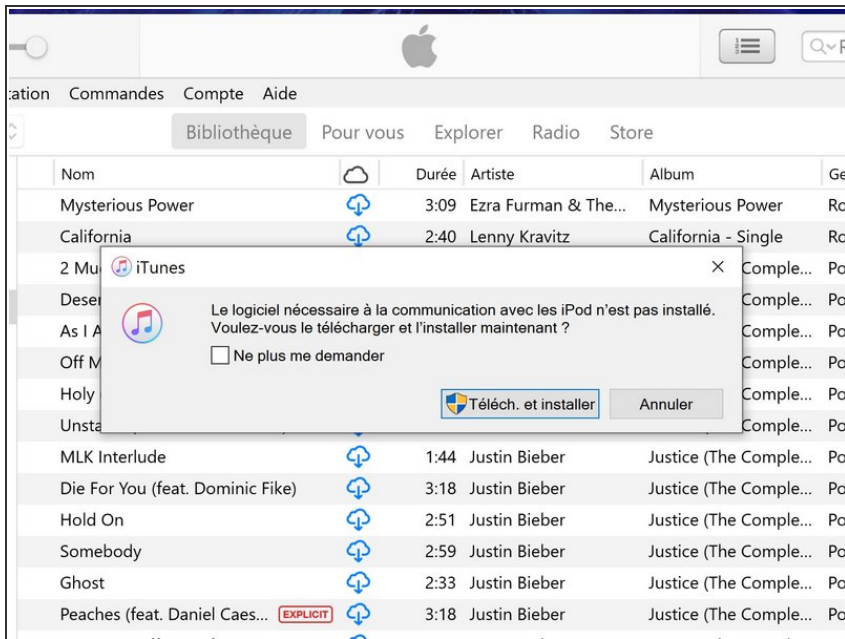

- After connecting the iPod to the PC you may need to install iPod support. Follow iTunes instructions. Unplug the iPod, Restart iTunes, Restart your PC. Replug the iPod.

Step 12 — Restore the iPod (software)

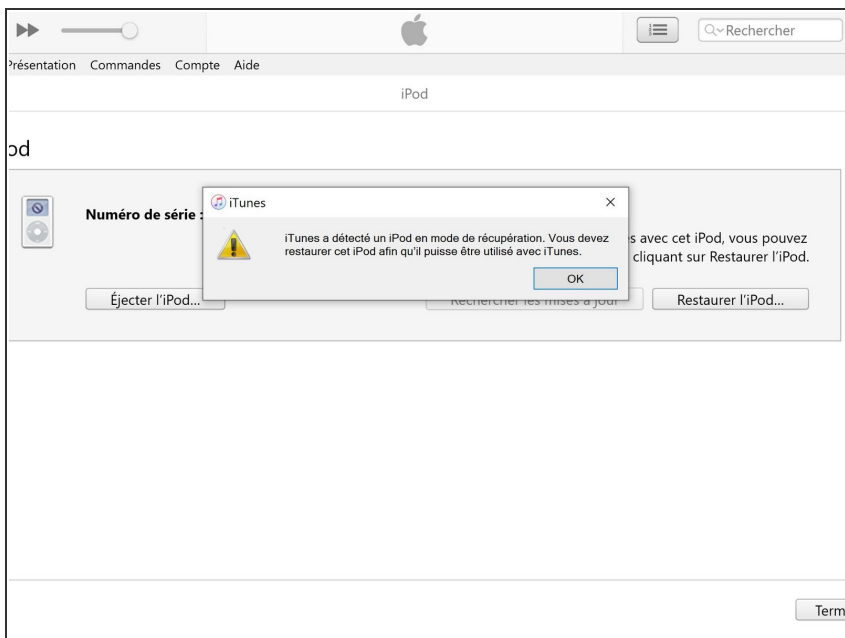

- Once connected to your computer, iTunes will tell you that the iPod needs to be restored. Follow iTunes instructions to restore the software.

Step 13 — Plug your iPod to a wall plug






- The iPod will prompt you to plug it to a wall plug. While this screen is displayed you can't continue.

⚠ Plugging the iPod to the computer is not enough. If it doesn't work check the power adapter or the iPod cable. iPhone wall adapter (1A) is sufficient for this task.

- If it reboots to the iPod menu (language settings) you have finished.

Step 14 — Finalize the software restoration process

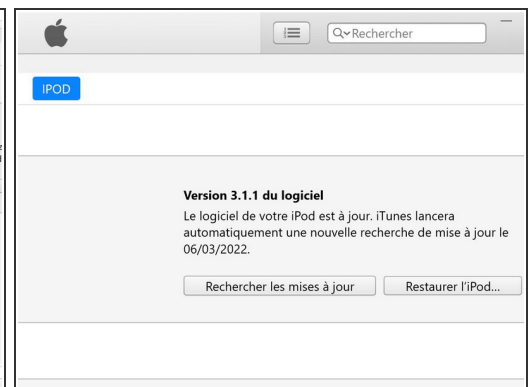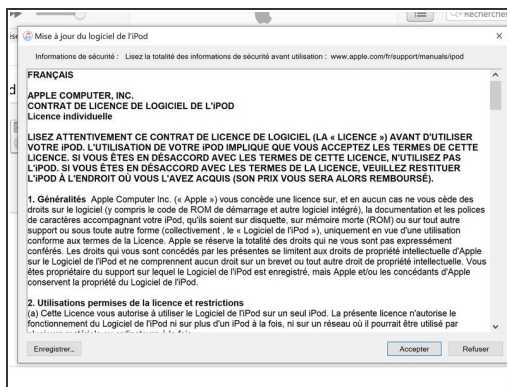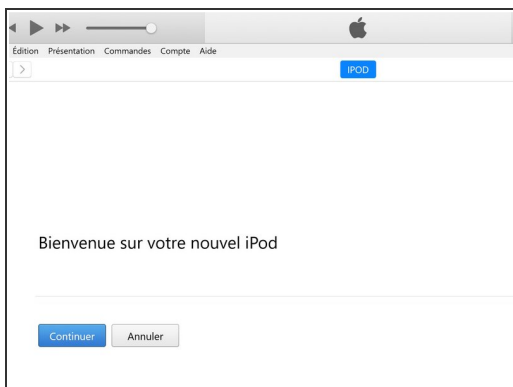

- Finalize the software restoration process by accepting the Apple license.

Step 15 — Test iPod before reassembling



- It's important that you check everything, from charging to synchronizing and listening to music before reassembling the iPod.
- If something is not functioning properly, double check each steps.

To reassemble your iPod follow the first step in reverse order of the tutorial you followed to open it.